



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Pradeep Dass Attorney Docket No. LAMA122654
Application No.: 10/811,772 Group Art Unit: 3672
Filed: March 29, 2004 Examiner: W. Neuder
Title: METHOD OF ADAPTING A DOWNHOLE MULTI-PHASE TWIN SCREW
PUMP FOR USE IN WELLS HAVING A HIGH GAS CONTENT AND A
DOWNHOLE MULTI-PHASE TWIN SCREW PUMP

LETTER TRANSMITTING PRIORITY DOCUMENT

May 1, 2006

TO THE COMMISSIONER FOR PATENTS:

Enclosed is a certified copy of the following application for which a claim of priority under 35 U.S.C. § 119 has been made:

<u>Country</u>	<u>Application No.</u>	<u>Filed</u>	<u>Title</u>
Canada	2357887	September 28, 2001	Method of Adapting a Downhole Multi-Phase Twin Screw Pump for Use in Wells Having a High Gas Content and a Downhole Multi-Phase Twin Screw Pump

Respectfully submitted,

CHRISTENSEN O'CONNOR
JOHNSON KINDNESS^{PLLC}

Kevan L. Morgan
Registration No. 42,015
Direct Dial No. 206.695.1712

I hereby certify that this correspondence is being deposited with the U.S. Postal Service in a sealed envelope as first class mail with postage thereon fully prepaid and addressed to Mail Stop The Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450, on the below date.

Date:

6. 5. 1. 2006

KLM:sdd



Office de la propriété
intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An Agency of
Industry Canada

*Bureau canadien
des brevets
Certification*

*Canadian Patent
Office
Certification*

La présente atteste que les documents
ci-joints, dont la liste figure ci-dessous,
sont des copies authentiques des docu-
ments déposés au Bureau des brevets.

This is to certify that the documents
attached hereto and identified below are
true copies of the documents on file in
the Patent Office.

Specification and Drawings, as originally filed, with Application for Patent Serial
No: **CA 2357887**, on September 28, 2001, by **PRADEEP DASS**, for "Method of Adapting
a Downhole Multi-Phase Twin Screw Pump for Use in Wells Having a High Gas Content
and a Downhole Multi-Phase Twin Screw Pump".

S. Lachance
Agent certificateur/Certifying Officer

March 20, 2006

Date

Canada

(CIPO 68)
31-03-04

OPIC  CIPO

ABSTRACT OF THE DISCLOSURE

A method of adapting a downhole multi-phase twin screw pump for use in wells having a high gas content. A first step involves positioning a supplementary liquid channel in a housing of the pump in fluid communication with a pumping screw
5 near an intake end of the pump. A second step involves feeding supplementary liquid through the supplementary liquid channel to the pumping screw, thereby enhancing a liquid seal around the pumping screw.

TITLE OF THE INVENTION:

Method Of Adapting a Downhole Multi-phase Twin Screw Pump
For Use In Wells Having A High Gas Content And A Downhole
Multi-phase Twin Screw Pump

5

FIELD OF THE INVENTION

The present invention relates to a method of adapting a
downhole multi-phase twin screw pump for use in wells having
a high gas content and a downhole multi-phase twin screw pump

10

BACKGROUND OF THE INVENTION

Canadian Patent Application 2,282,231 and corresponding
United States Patent Application 09/280,557 disclose a downhole
multi-phase twin screw pump. These pumps are, typically, used
15 in applications in which the medium being pumped includes oil,
water, some solids and gas. In situations where there is a
high gas content in the medium, the liquids present will be
insufficient to effectively seal gaps in the screw. As a
result there is a dramatic loss of pressure capability and
20 efficiency. In addition, there is an increase in heat build
up within the pump.

SUMMARY OF THE INVENTION

What is required is a method of adapting a downhole multi-
25 phase twin screw pump for use in wells having a high gas
content and a downhole multi-phase twin screw pump adapted in
accordance with the teachings of the method to be capable of
operating efficiently in wells having a high gas content.

30 According to one aspect of the present invention there is
provided a method of adapting a downhole multi-phase twin screw
pump for use in wells having a high gas content. A first step
involves positioning a supplementary liquid channel in a
housing of the pump in fluid communication with a pumping screw
35 near an intake end of the pump. A second step involves feeding
supplementary liquid through the supplementary liquid channel
to the pumping screw, thereby enhancing a liquid seal around

the pumping screw.

The high gas content in the fluid medium being moved by the downhole multi-phase twin screw pump deprives the twin screws of the liquid needed to form an effective liquid seal. The solution provided by the present invention is to supply supplemental liquid in sufficient quantity to make an effective liquid seal notwithstanding the high gas content.

According to another aspect of the present invention there is provided a downhole multi-phase twin screw pump which includes a housing having an intake end, an output end, and a fluid flow passage that extends between the intake end and the output end. Twin pumping screws are disposed in the fluid flow passage. A supplementary liquid channel extends through the housing in fluid communication with at least one of the twin pumping screws near the intake end of the housing. Means is provided for feeding supplementary liquid through the supplementary liquid channel to the at least one of the twin pumping screw, thereby enhancing a liquid seal around the twin pumping screws.

Once the teachings of the present invention are understood, it will be appreciated that there are several alternative ways of securing supplementary liquid for use in enhancing the liquid seal. Supplementary liquid can be obtained by positioning a liquid trap along a fluid flow passage extending through the housing of the pump to divert liquid passing through the pump. Supplementary liquid can, alternatively, be obtained by positioning a liquid trap adjacent a well head of the well to divert liquid passing from the well.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other features of the invention will become more apparent from the following description in which reference is

made to the appended drawings, the drawings are for the purpose of illustration only and are not intended to in any way limit the scope of the invention to the particular embodiment or embodiments shown, wherein:

5 **FIGURE 1** is a side elevation view, in section, of a downhole multi-phase twin screw pump constructed in accordance with the teachings of the present method.

10 **FIGURE 2** is a detailed side elevation view, in section, of an educator from the downhole multi-phase twin screw pump illustrated in **FIGURE 1**.

FIGURE 3 is a side elevation view, in section, of a downhole multi-phase twin screw pump positioned in a well in accordance with the teachings of the present method.

15 **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT**

 The preferred method of adapting a downhole multi-phase twin screw pump for use in wells having a high gas content will now be described with reference to two embodiments of downhole multi-phase twin screw pump. A first embodiment of downhole multi-phase twin screw pump, generally identified by reference numeral 10, will be described with reference to **FIGURES 1** and 2. A second embodiment of downhole multi-phase twin screw pump, generally identified by reference numeral 100, will be described with reference to **FIGURE 3**.

25

 Structure and Relationship of Parts:

 Referring to **FIGURE 1**, downhole multi-phase twin screw pump 10 includes a housing 12 having an intake end 14, an output end 16, and a fluid flow passage 18 that extends between intake end 14 and output end 16. Twin pumping screws 20 are disposed in fluid flow passage 18. A supplementary liquid channel 22 extends through housing 12 in fluid communication with twin pumping screws 20, preferably near intake end 14 of housing 12. A liquid trap 24 is provided that is in communication with fluid flow passage 18. Referring to **FIGURES 1** and 2, liquid trap 24 uses an educator 26 to capture a portion 28 of a liquid stream 30 being moved along fluid flow

passage 18 by twin pumping screws 20 and feeds that portion 28 of liquid stream 30 as supplementary liquid 32 through supplementary liquid channel 22 to one of twin pumping screws 20, thereby enhancing a liquid seal around twin pumping screws 20.

Operation:

The use and operation of downhole multi-phase twin screw pump will now be described with reference to **FIGURES 1** through **FIGURE 2**. Referring to **FIGURE 1**, to adapt downhole multi-phase twin screw pump 10 for use in wells having a high gas content, supplementary liquid channel 22 is positioned in housing 12 of downhole multi-phase twin screw pump 10 in fluid communication with twin pumping screws 20. Referring to **FIGURES 1** and **2**, as liquid stream 30 is moved along fluid flow passage 18 by twin pumping screws 20, liquid trap 24 uses educator 26 to capture portion 28 of liquid stream 30 and directs that portion 28 of liquid stream 30 into supplementary liquid channel 22. Supplementary liquid 32 is then fed through supplementary liquid channel 22 to twin pumping screws 20, thereby enhancing a liquid seal around twin pumping screws 20.

Structure and Relationship of Parts:

Referring to **FIGURE 3**, downhole multi-phase twin screw pump 100, in a combination which includes a housing 112 having an intake end 114, an output end 116, and a fluid flow passage 118 that extends between intake end 114 and output end 116. Twin pumping screws 120 are disposed in fluid flow passage 118. A supplementary liquid channel 122 extends through housing 112 in fluid communication with twin pumping screws 120 near intake end 114 of housing 112. A liquid trap 124 is positioned adjacent a well head 126 of well 128. This differs from first embodiment 10 in which liquid trap 24 was provided within housing 12. As with first embodiment 10, liquid trap 124 of second embodiment 100 also uses an educator 130 to capture a portion 132 of a liquid stream 134 being moved through well 128 by twin pumping screws 120 and feeds that portion 132 of liquid

stream 134 as supplementary liquid 136 through supplementary liquid channel 122 to twin pumping screws 120, thereby enhancing a liquid seal around twin pumping screws 120.

5 Operation:

The use and operation of second embodiment of downhole multi-phase twin screw pump will now be described with reference to **FIGURE 3**. Second embodiment of downhole multi-phase twin screw pump 100 operates in the same fashion as first
10 embodiment 10. To adapt downhole multi-phase twin screw pump 100 for use in wells 128 having a high gas content, supplementary liquid channel 122 is positioned in housing 112 of downhole multi-phase twin screw pump 100 in fluid communication with twin pumping screws 120. Although it is
15 preferable to have supplementary liquid channel 122 positioned near intake end 114 of downhole multi-phase twin screw pump 100, practical considerations may result in supplementary liquid channel only extending partially down housing 112. Liquid stream 134 is moved along fluid flow passage 118 by twin
20 pumping screws 120 and exits housing 112 and passes through wellhead 126 into liquid trap 124 that is adjacent to wellhead 126 of well 128. Liquid trap 124 then uses educator 130 to capture portion 132 of liquid stream 134 and directs that portion 132 of liquid stream 134 through a flow line 138 into
25 supplementary liquid channel 122 of housing 112. Supplementary liquid 136 is then fed through supplementary liquid channel 122 to twin pumping screws 120, thereby enhancing a liquid seal around twin pumping screws 120.

30 In this patent document, the word "comprising" is used in its non-limiting sense to mean that items following the word are included, but items not specifically mentioned are not excluded. A reference to an element by the indefinite article "a" does not exclude the possibility that more than one of the
35 element is present, unless the context clearly requires that there be one and only one of the elements.

6

It will be apparent to one skilled in the art that modifications may be made to the illustrated embodiment without departing from the spirit and scope of the invention as hereinafter defined in the Claims.

5

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

- 5 1. A method of adapting a downhole multi-phase twin screw pump for use in wells having a high gas content, comprising the steps of:
- positioning a supplementary liquid channel in a housing of the pump in fluid communication with a pumping screw; and
- 10 feeding supplementary liquid through the supplementary liquid channel to the pumping screw, thereby enhancing a liquid seal around the pumping screw.
2. The method as defined in Claim 1, wherein the supplementary
- 15 liquids are provided by a liquid trap which captures a portion of a liquid stream being moved by the pumping screw and recirculates that portion of the liquid stream as the supplementary liquid to the supplementary liquid channel.
- 20 3. The method as defined in Claim 2, wherein the liquid trap is positioned along a fluid flow passage extending through the housing of the pump.
4. The method as defined in Claim 2, wherein the liquid trap
- 25 is positioned adjacent a well head of the well.
5. The method as defined in Claim 3 or 4, wherein the liquid trap uses an educator to capture the portion of the liquid stream.

6. A method of adapting a downhole multi-phase twin screw pump for use in wells having a high gas content, comprising the steps of:

5 positioning a supplementary liquid channel in a housing of the pump in fluid communication with a pumping screw near an intake end of the pump;

 providing a liquid trap which uses an educator to capture a portion of a liquid stream being moved by the pumping screw;

10 and

 feeding supplementary liquid from the liquid trap through the supplementary liquid channel to the pumping screw, thereby enhancing a liquid seal around the pumping screw.

15 7. The method as defined in Claim 6, wherein the liquid trap is positioned along a fluid flow passage extending through the housing of the pump.

 8. The method as defined in Claim 6, wherein the liquid trap
20 is positioned adjacent a well head of the well.

9. A downhole multi-phase twin screw pump, comprising:

a housing having an intake end, an output end, and a fluid flow passage that extends between the intake end and the output

5 end;

twin pumping screws disposed in the fluid flow passage;

a supplementary liquid channel extending through the housing in fluid communication with at least one of the twin pumping screws near the intake end of the housing; and

10 means for feeding supplementary liquid through the supplementary liquid channel to the at least one of the twin pumping screw, thereby enhancing a liquid seal around the twin pumping screws.

15 10. The pump as defined in Claim 9, wherein the means for feeding supplementary liquid through the supplementary liquid channel is a liquid trap in communication with the fluid flow passage which captures a portion of a liquid stream being moved along the fluid flow passage by the twin pumping screws and
20 recirculates that portion of the liquid stream as the supplementary liquid to the supplementary liquid channel.

11. The pump as defined in Claim 9, wherein the liquid trap uses an educator to capture the portion of the liquid stream.

25

12. A downhole multi-phase twin screw pump, comprising:

a housing having an intake end, an output end, and a fluid flow passage that extends between the intake end and the output
5 end;

twin pumping screws disposed in the fluid flow passage;

a supplementary liquid channel extending through the housing in fluid communication with at least one of the twin pumping screws near the intake end of the housing; and

10 a liquid trap in communication with the fluid flow passage which uses an educator to capture a portion of a liquid stream being moved along the fluid flow passage by the twin pumping screws and feeds that portion of the liquid stream as supplementary liquid through the supplementary liquid channel
15 to the at least one of the twin pumping screw, thereby enhancing a liquid seal around the twin pumping screws.

13. A downhole multi-phase twin screw pump, comprising in combination:

5 a housing having an intake end, an output end, and a fluid flow passage that extends between the intake end and the output end;

twin pumping screws disposed in the fluid flow passage;

10 a supplementary liquid channel extending through the housing in fluid communication with at least one of the twin pumping screws near the intake end of the housing; and

15 a liquid trap positioned adjacent a well head of the well which uses an educator to capture a portion of a liquid stream being moved through the well by the twin pumping screws and feeds that portion of the liquid stream as supplementary liquid through the supplementary liquid channel to the at least one of the twin pumping screw, thereby enhancing a liquid seal around the twin pumping screws.

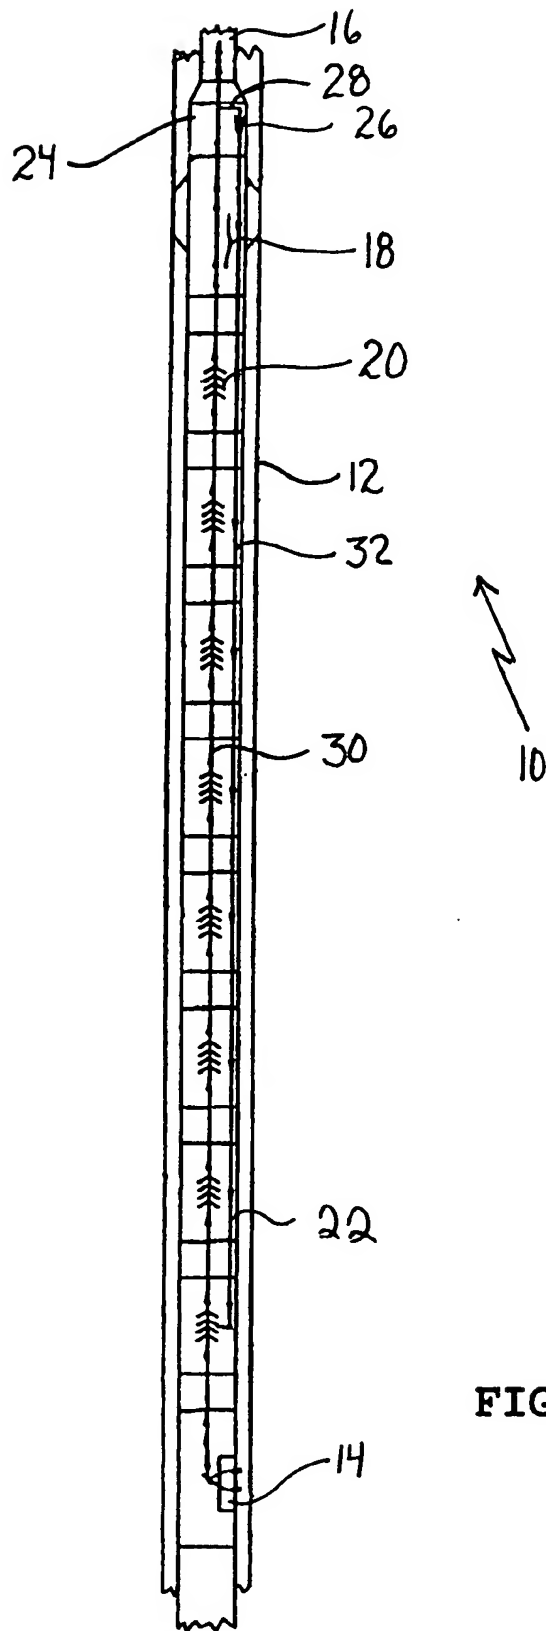


FIGURE 1

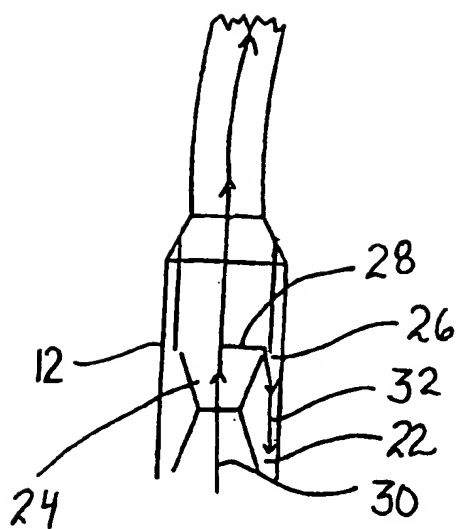


FIGURE 2

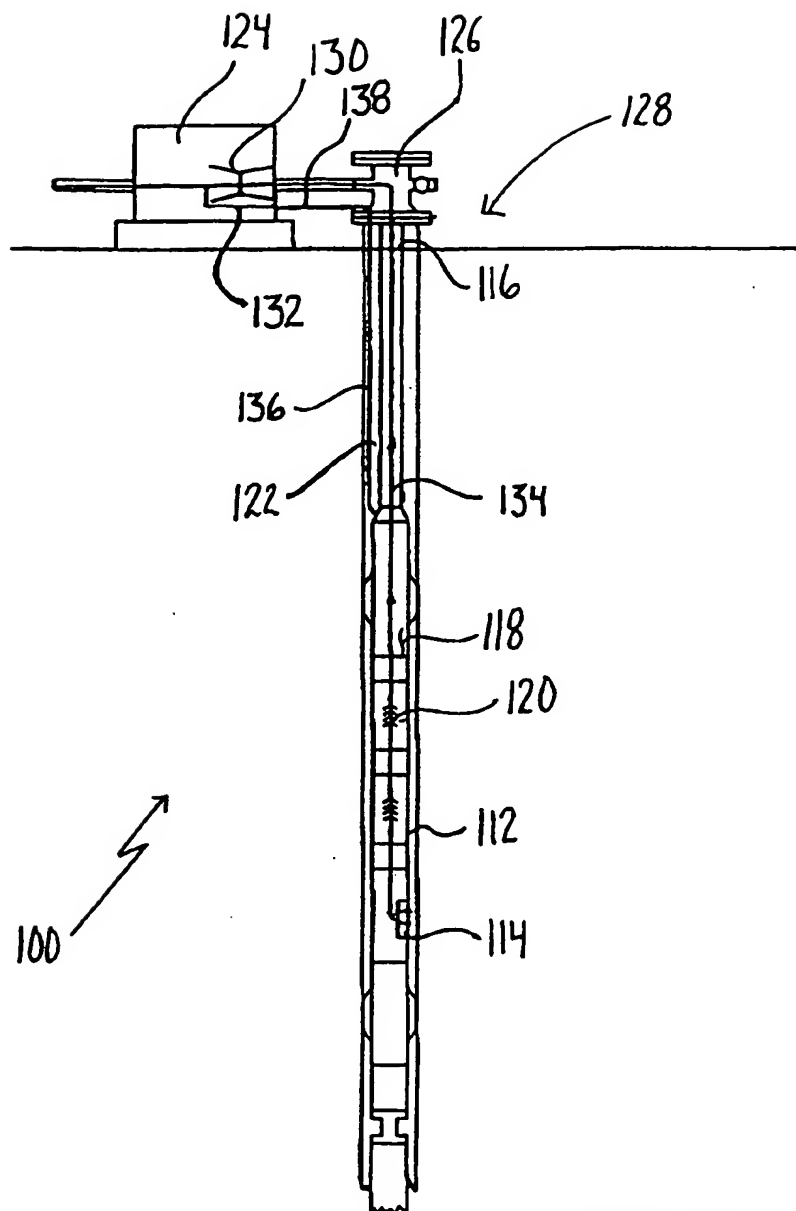


FIGURE 3